

RS 2400 featuring the 4 pi X-ray Tube

Rad Source Technologies RS 2400 specializes in providing non-isotope, ionizing irradiation. Ionizing radiation that is similar to radioactive sources, cobalt-60 and cesium-137. However, unlike the gamma radiation being generated by the radioactive sources, the RS 2400 utilizes Rad Source's patented technology to generate a 4pi X-ray ionizing radiation field *without* a radioactive source. Because there is no radioactive source, the RS 2400 is much safer and less expensive to own and operate.

Features and Benefits

- Just-In-Time supply management helps to control costs
- Safe, the unit is self-shielded with no radioactive source
- Secure, system is password protected
- Turn-key installation
- Easy to operate using a simple, easy-to-read touch pad
- Service and Support – 12 month full warranty
- Source Assurance/Core Exchange program eligible
- Does not require a US Nuclear Regulatory Commission (NRC) license
- Industry accepted ISO 11137:2006 and EN 552

Technical Specifications*


- Dose Rate: 420,000 rad/h (4.2 kGy/h) based on product density
- Dose Uniformity Ratio: Better than 1.3
- Number of Canisters: 5 – 7 per cycle based on product density and unit configuration
- Processing Canisters: Diameter 3" (7.62 cm) to 7" (17.78 cm), height 8" (20.32 cm)
- Cabinet Dimensions: Length 72" (183 cm), Width 33" (84 cm), Height 51" (130 cm)
- Cabinet Weight: Net 2350 lbs (1066 kg)
- Power Requirements: US 208 VAC, EU 400 VAC
- Cooling system with high capacity water to air heat exchanger (separate external unit)
- Single 4pi Au target X-ray Tube

Applications

Sterile Insect Technique (SIT/SIR)
Medical Device Terminal Sterilization
Polymer

- Recombination
- Cross-linkage
- Chain scission

Food Irradiation Research
Phytosanitation
Cell Research
Viral Inactivation
Other Forms of Research

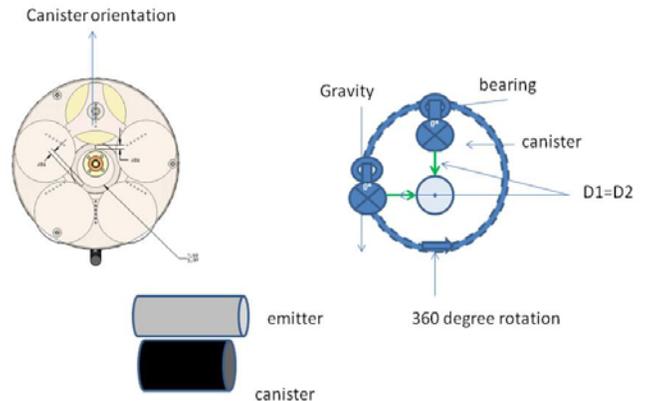

*Technical specifications are subject to change, please contact your Rad Source representative for the most current information.